


TABLES INCLINABLES

Kwiktool


NEU
NEW

Typ UT2 Type UT2

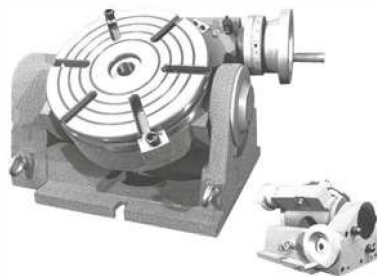

- stabile Bauweise
- Übersetzungsverhältnis 1:120
- Winkel verstellbar 90°
- mit 10" Nonius
- Skalenteilung 1'

- rugged construction
- ratio 1:120
- tilting range 90°
- with 10" vernier
- graduation 1'

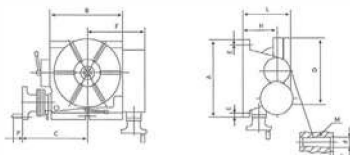

A mm	B mm	C mm	D mm	E mm	F mm	H mm	L mm	MK / MT	Nut / Slot mm	kg	Art.-Nr. / Order no.	
320	265	240	250	18	210	150	230	3	14	93	13-UT2-250	
380	330	245	320	18	241	175	265	4	14	150	13-UT2-320	
460	410	280	400	18	280	217	320	4	16	305	13-UT2-400	
670	1000	630	600	22	365	480	480	4	18	780	13-UT2-630	

NEU
NEW

Flansch passend zu Typ UT2 Adaptor plate suitable for type UT2

passend zu Typ / suitable for type	für Drehfutter Ø / for chuck Ø	Art.-Nr. / Order no.
13-UT2-250	WAT-D201/3-ZGE	13-UT2-250FL
13-UT2-320	WAT-D251/3-ZGE	13-UT2-320FL
13-UT2-400	WAT-D321/3-ZGE	13-UT2-400FL
13-UT2-630	WAT-D501/3-ZGE	13-UT2-630FL

Dreibacken-Drehfutter passend für Flansch zu Typ UT2 Three-jaw lathe chucks suitable for adaptor for type UT2



NEU
NEW

passend zu Flansch/ suitable for adaptor plate	Ø mm	Art.-Nr. / Order no.
13-UT2-250FL	200	WAT-D201/3-ZGE
13-UT2-320FL	250	WAT-D251/3-ZGE
13-UT2-400FL	320	WAT-D321/3-ZGE
13-UT2-630FL	500	WAT-D501/3-ZGE

Schwenkbare Spanntische, 90° Heavy-duty tilting plates, 90°

- zum Aufspannen von verschiedenen Vorrichtungen, wie z.B. Schraubstöcken, Drehfuttern, etc.

- used for mounting of different devices, such as vices, lathe chucks, etc.

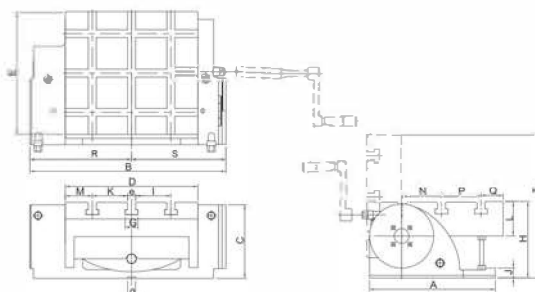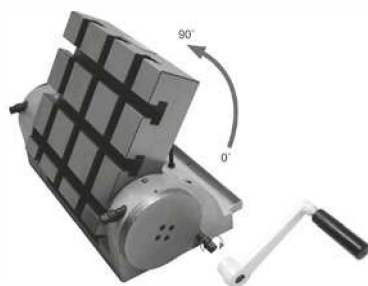




Belastbarkeit / loading capacity	Horizontal / horizontal kg	Vertikal / vertical kg
14-SSP-150	30	12
14-SSP-270	45	20
14-SSP-320	70	35

A mm	B mm	C mm	D mm	E mm	Positioniernut g / positioning slot g	G mm	H mm	F mm	J mm	L mm	K mm	M mm	N mm	P mm	Q mm	R mm	S mm	Nut (e) / Slot (e) mm	T mm	kg	Art.-Nr. / Order no.	
180	285	113	156	150	16	20	115	44	16	50	44	28	50	50	30	145	140	10	251	18	14-SSP-150	
255	399	150	270	258	16	22	155	72	20	70	72	55	80	80	45	207	192	12	291	60	14-SSP-270	
300	449	169	320	298	16	26	169	92	25	75	92	60	98	100	48	232	217	16	305	83	14-SSP-320	

- Lagerstandard / in stock
- ▲ innerhalb weniger Tage / within a few days
- auf Anfrage / on request
- * auslaufende Größe / as stock lasts

Schwenkbarer Spanntisch, Typ HWCK2 Swivel angle plate, type HWCK2



- in beide Richtungen schwenkbar
- $\pm 45^\circ$ verstellbar
- swivel-type
- adjustable $\pm 45^\circ$



Größe / Size	A mm	B mm	C mm	K mm	kg	Art.-Nr. / Order no.
250x180	255	180	136	16	22	14-HWCK2-250
300x240	302	241	164	16	40	14-HWCK2-300
380x260	381	255	185	16	50	14-HWCK2-380

Dreh- und schwenkbarer Spanntisch Swivel and tiltable angle plate

- 360° drehbar, 30° schwenkbar
- schnelle, einfache Einstellung
- Präzisionsgeschliffene Grundplatte
- Belastbarkeit: 15 kg
- 360° rotatable, 30° tiltable
- fast and simple setting
- plate is precisely ground
- loading capacity: 15 kg

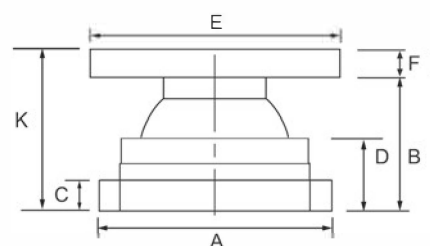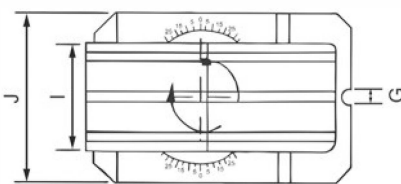


A mm	B mm	C mm	D mm	E mm	I mm	F mm	G mm	H mm	J mm	K mm	kg	Art.-Nr. / Order no.
190	120	20	72	200	100	34	17	12	140	153	15	ZE-MDS-200
190	120	20	72	250	126	34	17	12	140	153	17	ZE-MDS-250

Spanntische Swivel angle plates

Dreh- und schwenkbarer Spanntisch, 360° Swivel and tiltable angle plate, 360°

- einstellbare Neigung 0-45°
- 360° drehbar
- with adjustable angle 0-45°
- 360° rotatable

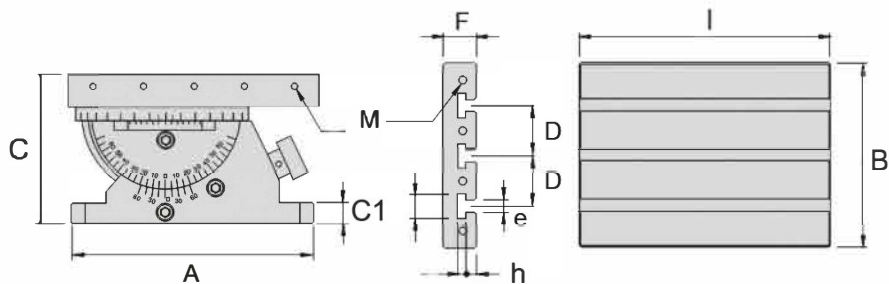



A mm	C mm	C1 mm	B mm	I mm	D mm	F mm	e mm	h mm	M mm	kg	Art.-Nr. / Order no.
300	183	25	220	300	60	40	14	22	M8	47	ZE-KTS-300

Stationäre Drehfutter Stationary lathe chucks

Stationäre Dreibacken-Drehfutter, extraflach Stationary three-jaw lathe chucks, extra thin



- Winkel zwischen Handgriff und Drehplatte beträgt 30°, dadurch bequeme Bedienung
- geringe Bauhöhe des Futter für mehr Arbeitsraum
- harte und weiche Aufsatzbacken können eingesetzt werden
- 30° angle between wrench and base for ease of handling
- extra thin chuck design increases machining space
- may be used with hard or soft top jaws



Harte Grundbacken für Stationäre-Dreibacken-Drehfutter Hard base jaws for stationary three-jaw-lathe chucks

Art.-Nr. /
Order no.

- ZE-SDF3/GB-170
- ZE-SDF3/GB-210
- ZE-SDF3/GB-255
- ZE-SDF3/GB-305

Typ / Type	A mm	A1 mm	B mm	B1 mm	D mm	F mm	E mm	C mm	G mm	H mm	K mm	J mm	L mm	g mm	Spannbereich / Clamp. range mm	kg	Art.-Nr. / Order no.
170	220	170	58	18	130	147	45	6	3-M10	68	26	40	10	13	8-160	12	ZE-SDF3-170
210	270	210	65	20	155	172	60	6	3-M10	82	28	43	11	13	11-200	20	ZE-SDF3-210
255	315	255	73	20	190	210	80	6	3-M12	93	32	52	12	16	12-250	30	ZE-SDF3-255
305	370	305	80	22	250	285	105	5	3-M12	118	40	59	14	18	15-300	47	ZE-SDF3-305

Inkl. Bedienschlüssel / Incl. wrench

Passende Aufsatzbacken siehe Seiten 24 und 25
Suitable jaws see pages 24 and 25

